

Quick Duct Connecting Clamp



**FRESH AIR
SUPPLIES**



Description


The FLKA clamp is the most important component of TRANS-Quick System. It is used to connect two components - ventilation pipes or fittings of circular cross-section. Pipes and fittings have rolled-up edge at height about 5-7 mm at 90 degrees angle. The components are clamped together with connecting clamps snapped into place quickly and effectively sealing it centripetally.

The major advantage of clamp-together system is its quick assembly and disassembly without having to displace the installation – 1 - 3 components can be removed without taking apart the others. Smooth interior, no internal inserts which could block the airflow if covered with sawdust or other particles - fewer bug harbors and snag opportunities.



Additionally the clamp is equipped with a bolt, which needs to be tightened to ensure system airtightness, and a gasket made from TPE-E material.

Dimensions

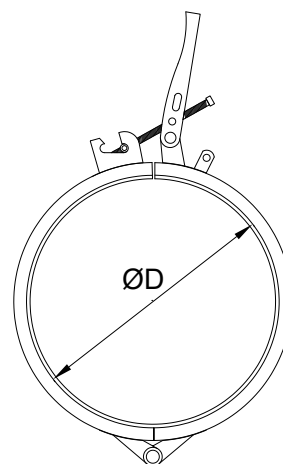

Product code	Diameter ØD [mm]
FLKA-C-100	100
FLKA-C-125	125
FLKA-C-150	150
FLKA-C-160	160
FLKA-C-180	180
FLKA-C-200	200
FLKA-C-225	225
FLKA-C-250	250
FLKA-C-300	300
FLKA-C-315	315
FLKA-C-350	350
FLKA-C-400	400
FLKA-C-450	450
FLKA-C-500	500
FLKA-C-550	550
FLKA-C-600	600

Assembly



Get in touch with the Fresh Air Supplies Team!



Call: +44 (0) 28 86752336



Email: sales@freshairsupplies.co.uk

IE: sales@freshairsupplies.ie